



HSM V-Press 818



HSM V-Press 818 vertical baling press

Thanks to its low transport height, the HSM V-Press 818 can be easily transported to wherever it needs to be used.

Technical data

Order number:	6150334	Loading aperture width x height:	1195 x 540 mm
EAN	4026631074414	Bale length x Bale width x Bale height:	1200 x 780 x 700 mm
Pressing power:	185 kN	Bale weight:	200 kg
Specific pressing power:	19,23 N/cm ²	Width x Depth x Height:	1709 x 1248 x 2370 mm
Driving power:	4 kW	Weight:	1173 kg
Voltage / Frequency:	400 V / 50 Hz	Related product line:	V-Press
Cycle time when idling vacío:	27 s	Type of consumables:	Strapping tape
Volume throughput in idle operation (theor.):	5 m ³ /h	Press material:	Plastic film, Mixed paper, Cardboard, Punch waste/residue, Clothing
Loading height:	958 mm		

Product information



To fill the press, the upper half of the doors is pushed down and automatically opens after the compression process



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



Low installation height and small footprint

HSM®




Compresses cardboard and film

Suitable for cardboard as well as film.



Automatic start

Automatic start of the pressing process after closing the door.

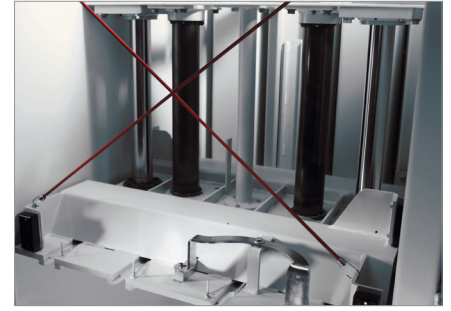

Optimized pressing

Massive press ram and extremely robust press plate guidance.



Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.



HSM TCS

HSM TCS (Torsion Control System) for monitoring press ram movement.



Strapping

Manual bale strapping with continuous polyester tape.



www.tuev-sued.de/ps-zert

www.hsm.eu

