




# M-SERIES

Lion Commercial Safe

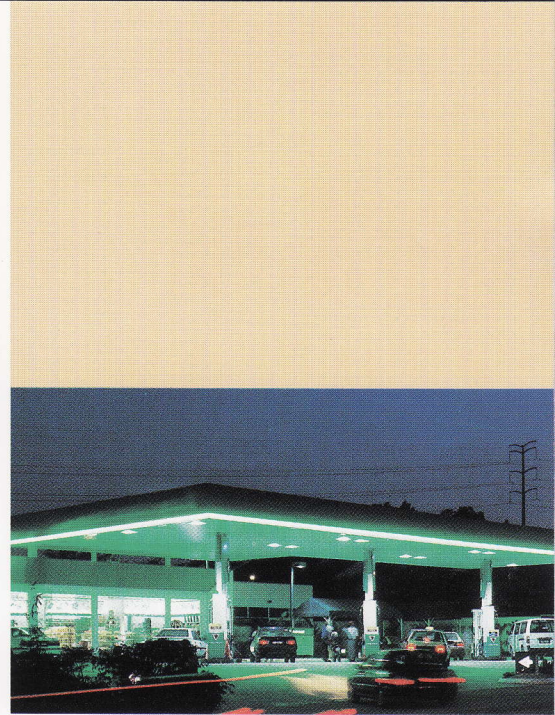

Maximum  
Convenience,  
Minimum  
Trouble





# LION M-SERIES SAFE

## UP TO PACE...

In today's fast paced world, time is a luxury that many cannot afford to waste. Factors such as convenience and the need for fast, accurate service are now more important than ever.

That's why we created the M-Series. The Lion M-Series safe is made to suit businesses that cater to the fast paced consumer. Businesses like fastfood outlets, service stations and clubs where cash transactions take place.


Businesses that are as fast paced as life itself. Businesses like yours.

## SPECIAL FEATURES

The quality of safe can only be assessed in terms of its structure, boltwork and locking systems. The material used in the construction of Lion M-Series safe is a time-tested high density MegaMix 1.

- **MegaMix 1:** A newly developed burglar-and-fire-resistant agglomerate of high density and strength, impervious to the blowtorch as well as providing effective resistance to hand and mechanical tools.
- **Body:** Of monolithic construction, the overall thickness is 75mm, incorporating MegaMix 1 Material.
- **Door:** The protective thickness is 55mm embodying MegaMix 1 Material reinforced with steel and a drill-resisting plate protecting the lock area.
- Additional protection against point-attack is given to vital parts of the boltwork by means of drill-resisting deflectors.
- The standard locking is one Mauer keylock, plus a S & G 3-wheel combination lock.
- **Boltwork:** Improved boltworks with top and bottom bolts and fixed rebate at the rear. Each bolt is 32mm in diameter.
- A passive relocking device, independent of the locks, will automatically block the moving boltwork in the event of a determined attack against the door.
- **Base Fixing:** Available as an optional extra.

A combi version is available, which is a safe within a safe. For the protection of limited amounts of cash, a special drawer trap as per MT1 and MT2 allows deposits without having to open the safe.




## Colours Available


Maroon

Beige

## TECHNICAL DIMENSION & DETAILS

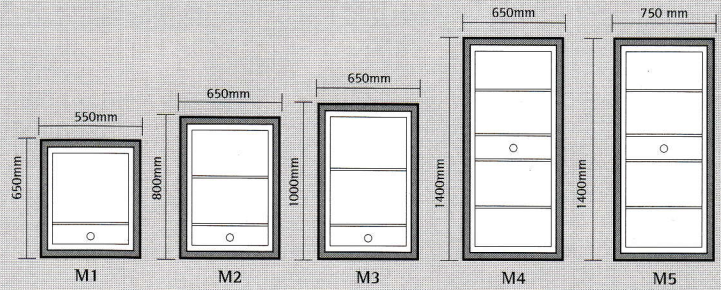

## OPENING DETAILS



	M1	M2	M3	M4	M5
Overall depth	A mm	660	760	760	910
Door Open 90°	B mm	1092	1292	1292	1542
Door Open 180°	C mm	990	1190	1190	1390

## DIMENSION OF BODY

		M1			M2			M3			M4			M5		
		W	D	H	W	D	H	W	D	H	W	D	H	W	D	H
EXTERNAL	mm	550	600	650	650	700	800	650	700	1000	650	700	1550	750	850	1550
INTERNAL	mm	395	410	500	495	510	650	495	510	850	495	510	1400	595	660	1400
CAPACITY	litres	81			164			214			353			550		
NET WEIGHT	kgs	324			490			565			845			1038		
SHIPPING																
DIMENSION	mm	670	750	900	770	850	1050	770	850	1250	770	850	1800	870	1000	1800
SHIPPING																
VOLUME	cu.m	0.45			0.69			0.82			1.18			1.57		
GROSS WEIGHT	kgs	380			550			647			953			1142		
BOLTS	Ø32															
TOP-EDGE-																
BOTTOM	NO.	1-3-1			1-3-1			1-5-1			1-5-1			1-5-1		
DRAWER		PROVIDED			PROVIDED			PROVIDED			PROVIDED			PROVIDED		

## OTHER DETAILS

Unit with Drawer Trap	Net Weight KGS	Dimension (External)			Shipping Dimension			Shipping Volume	Gross Weight	Bottom Drawer
		W	D	H	W	D	H			
MT1	412	550	600	808	670	750	1060	0.54	462	Not Provided
MT2	618	650	700	958	770	850	1210	0.80	683	Provided



SIRIM  
CERTIFIED TO MS ISO 9001:2000  
Registration No: AR 3005

MS ISO 9001:2000 REG. NO. AR 3005

MS ISO 9001:2000 REG. NO. AR 3005

**MS ISO 9001 : 2000**  
QUALITY MANAGEMENT SYSTEM  
FROM SIRIM QAS INTERNATIONAL

