



PERNUMA OFFICE D
Electric Date Perforating Machine

This machine is supplied with a complete set of figure slides consisting of 18 pieces in its standard version in order to be able to perforate a 6-digit date. These so-called slides are small metal sticks which can very fast and easily be inserted into/respectively pulled out of the machine from the front of it.

Both models can contain 2 lines with a max. width of 80 mm each, for example a date and a fixed text above or below it or 2 lines of text.

The standard character heights are 6, 8 or 10 mm.

All perforating machines from our OFFICE series are equipped with an easy-to-exchange block-type-die-unit.

The insertion depth is 42 mm.

Up to 20 sheets of 70 g/m² paper can be perforated in one operation depending on the number of digits. The insertion height is 2 mm.


The perforation is effected by lateral fastened push-buttons. The main switch is at the rear of the machine.


All OFFICE machines can be supplied with a foot switch or a safety lock.

In case of order please always state where on the forms the impression is required so that it appears legible.

PERNUMA OFFICE T
Electric Text Perforating Machine

This machine is manufactured with a fixed text of your choice.

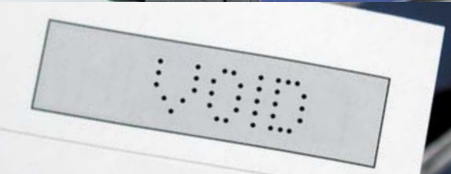

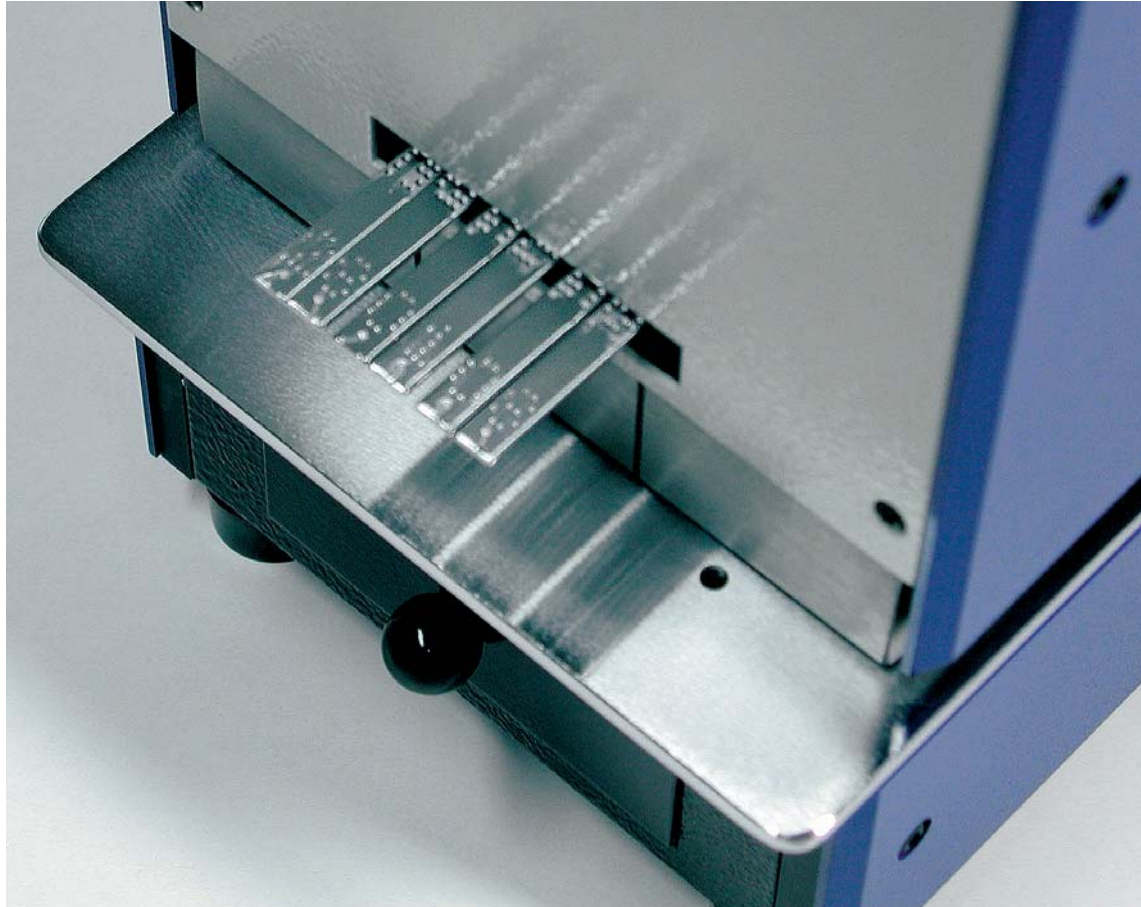

PERNUMA OFFICE D
Electric Date Perforating Machine

Technical Data

PERNUMA OFFICE D

Type of current	230 V / 50 cps special voltage upon request
Insertion depth	42 mm
Weight net / gross	18 kg / 20.5 kg
Machine dimensions	15.4 x 29.0 x 31.5 cm
Packaging	carton
Packaging dimensions	39 x 33 x 54 cm

PERNUMA OFFICE T
Electric Text Perforating Machine

Technical Data

PERNUMA OFFICE T

Type of current	230 V / 50 cps special voltage upon request
Insertion depth	42 mm
Weight net / gross	18 kg / 20.5 kg
Machine dimensions	15.4 x 29.0 x 31.5 cm
Packaging	carton
Packaging dimensions	39 x 33 x 54 cm



Figure height 6 mm, pin Ø 0.8 mm



Figure height 8 mm, pin Ø 0.9 mm



Figure height 10 mm, pin Ø 1.1 mm



Figure height 6 mm, pin Ø 0.8 mm




Figure height 8 mm, pin Ø 0.9 mm




Figure height 10 mm, pin Ø 1.1 mm

