



HSM V-Press 860



HSM V-Press 860 vertical baling press

With a pressing power of 594 kN and employing low-noise and energy-saving technology, the HSM V-Press 860 is the most economical and ecological solution for your waste disposal.

Technical data

Order number:	6148284	Bale length x Bale width x Bale height:	1200 x 780 x 1200 mm
EAN	4026631073585	Bale weight:	480 kg
Pressing power:	594 kN	Noise level (idle operation):	ca. 65 dB(A)
Specific pressing power:	63,46 N/cm ²	Width x Depth x Height:	1797 x 1247 x 2985 mm
Driving power:	4 kW	Weight:	2008 kg
Voltage / Frequency:	400 V / 50 Hz	Related product line:	V-Press
Cycle time when idling vacío:	25 s	Type of consumables:	Wire
Volume throughput in idle operation (theor.):	12 m ³ /h	Press material:	Plastic film, Mixed paper, Cardboard, Punch waste/residue, Clothing, Big Bags, Polystyrene
Loading height:	1110 mm		
Loading aperture width x height:	1195 x 650 mm		

Product information



To fill the press, the upper half of the doors is pushed down and automatically opens after the compression process



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



Suitable for cardboard as well as film





Compresses cardboard and film

Suitable for cardboard as well as film.



Automatic start

Automatic start of the pressing process after closing the door.



Economical

Optimised bale dimensions and bale weights for efficient storage, transport and direct commercialisation.




Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.



HSM TCS

HSM TCS (Torsion Control System) for monitoring press ram movement.

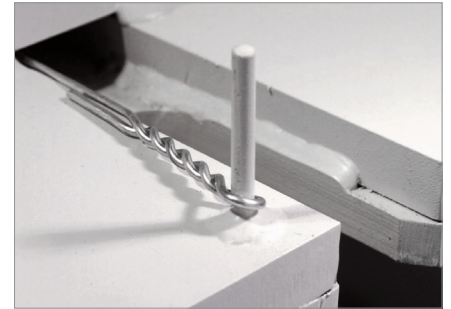

Strapping

Strapping with wire - optional tape station available for strapping with polyester tape or wire according to requirements.



www.tuev-sued.de/ps-zert

www.hsm.eu

HSM®